

Uisolerede terminalrør

Terminalrør til 1-leder. Løse i poser


SPECIFIKATIONER:

Materiale: Galvanisk fortinnet SF-kobber DIN 1787

Tolerance: DIN 46228/1 Form A

Temp. bestandighed: Op til 105°C, vedvarende

Godkendelser: UL/CSA

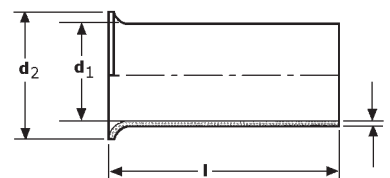

Best. nr.	Type i mm ²	Længde	d1	d2	S	Salgsenhed
300014	0,14	7 mm	0,7	1,6	0,15	1000
300038	0,25	7 mm	0,8	1,7	0,15	1000
300069	0,50	6 mm	1,0	2,1	0,15	1000
300076	0,50	8 mm	1,0	2,1	0,15	1000
300106	0,75	6 mm	1,2	2,3	0,15	1000
300113	0,75	8 mm	1,2	2,3	0,15	1000
300120	0,75	10 mm	1,2	2,3	0,15	1000
300168	1,0	6 mm	1,4	2,5	0,15	1000
300205	1,0	12 mm	1,4	2,5	0,15	1000
300212	1,0	15 mm	1,4	2,5	0,15	1000
300243	1,5	7 mm	1,7	2,8	0,15	1000
300250	1,5	8 mm	1,7	2,8	0,15	1000
300267	1,5	10 mm	1,7	2,8	0,15	1000
300274	1,5	12 mm	1,7	2,8	0,15	1000
300281	1,5	15 mm	1,7	2,8	0,15	1000
300328	2,5	8 mm	2,2	3,4	0,15	1000
300441	6	10 mm	3,5	4,7	0,20	1000
300458	6	12 mm	3,5	4,7	0,20	1000

CERTIFICERING:



Fortsættes næste side

Uisolerede terminalrør

Terminalrør til 1-leder. Løse i poser


SPECIFIKATIONER:

Materiale: Galvanisk fortinnet SF-kobber DIN 1787

Tolerance: DIN 46228/1 Form A

Temp. bestandighed: Op til 105°C, vedvarende

Godkendelser: UL/CSA

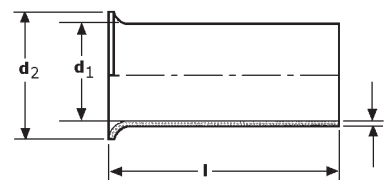

Best. nr.	Type i mm ²	Længde	d1	d2	S	Salgsenhed
300496	10	12 mm	4,5	5,8	0,20	1000
300502	10	15 mm	4,5	5,8	0,20	500
300564	16	15 mm	5,8	7,5	0,20	500
300649	25	12 mm	7,3	9,5	0,22	250
300656	25	15 mm	7,3	9,5	0,22	250
300663	25	18 mm	7,3	9,5	0,22	250
300670	25	20 mm	7,3	9,5	0,22	250
300717	35	15 mm	8,3	11,0	0,22	100
300786	50	22 mm	10,3	13,0	0,30	100
300823	70	22 mm	12,5	15,0	0,40	100
300861	95	25 mm	14,5	17,0	0,40	50
300878	95	30 mm	14,5	17,0	0,40	50
300946	185	32 mm	20,0	23,5	0,60	25

CERTIFICERING:

